


ILX45 ~ Piquage plat 45° à joint

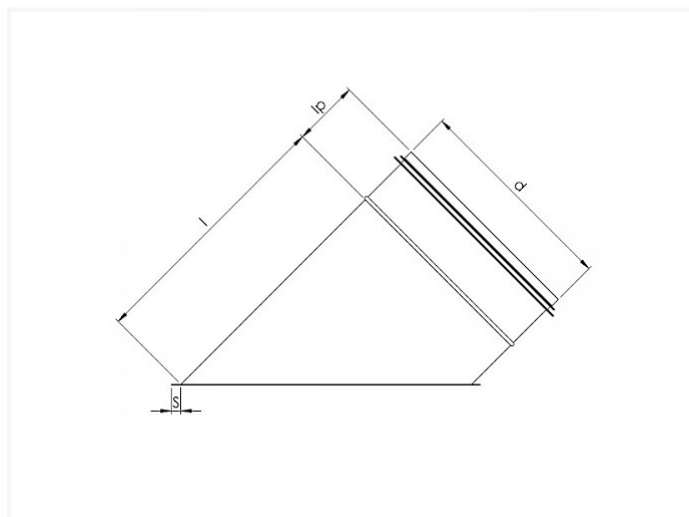

Fiche technique

DIAMÈTRE D	I	IP	S	KG	CARTON	PIÈCES
80	115	40	7 ± 1	0.15		
100	135	40	7 ± 1	0.19	P4	65
125	160	40	7 ± 1	0.30	P4	50
150	185	40	7 ± 1	0.34	P4	30
160	195	40	7 ± 1	0.40	P2	60
180	215	40	7 ± 1	0.43	P2	50
200	235	40	7 ± 1	0.43	P2	50
224	259	40	7 ± 1	0.50	P2	36
250	285	40	7 ± 1	0.90	P1	42
315	350	40	7 ± 1	1.00	P1	25
355	390	40	7 ± 1	1.26	P1	20
400	435	40	7 ± 1	1.78	P1	12
450	495	70	7 ± 1	2.37	P1	7

DIAMÈTRE D	I	IP	S	KG	CARTON	PIÈCES
500	545	70	7±1			
560	605	70	7±1			
630	675	70	7±1			