


# DSLXMP ~ Registre étanche à joint avec plaque pour moteur

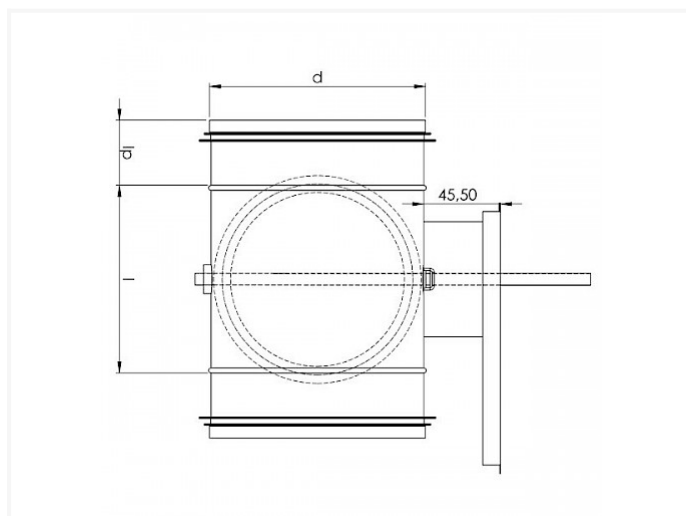

| DIAMÈTRE D | I   | IP | KG   |
|------------|-----|----|------|
| 80         | 105 | 35 |      |
| 100        | 105 | 35 | 0.61 |
| 125        | 105 | 35 | 0.75 |
| 140        | 105 | 35 |      |
| 150        | 105 | 35 |      |
| 160        | 105 | 35 | 0.84 |
| 180        | 105 | 35 |      |
| 200        | 105 | 35 | 1.16 |
| 224        | 115 | 35 |      |
| 250        | 115 | 35 | 1.41 |
| 280        | 115 | 35 |      |
| 300        | 115 | 35 |      |
| 315        | 115 | 35 | 1.84 |

| DIAMÈTRE D | I   | IP  | KG |
|------------|-----|-----|----|
| 355        | 115 | 35  |    |
| 400        | 115 | 35  |    |
| 450        | 80  | 70  |    |
| 500        | 80  | 70  |    |
| 560        | 80  | 70  |    |
| 630        | 80  | 70  |    |
| 710        | 80  | 70  |    |
| 800        | 95  | 100 |    |