


BUSB ~ Eindstuk 45°

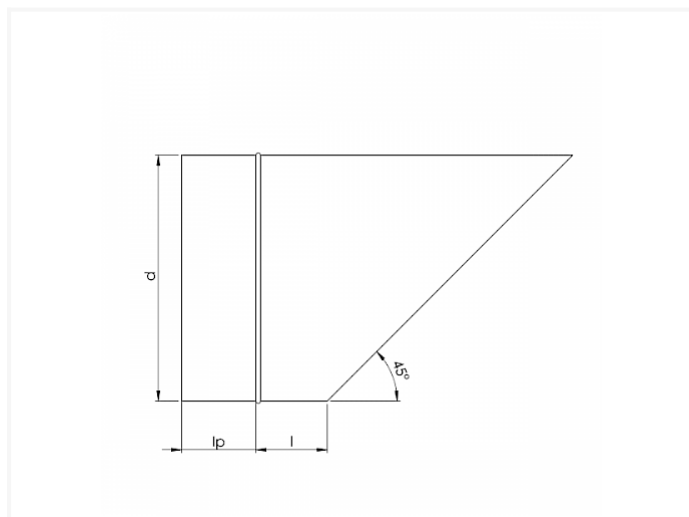

Technische specificaties

DIAMETER D	I	IP	KG	DOOS	STUKS
80	55	40	0.14		
100	55	40	0.19	P4	65
125	55	40	0.24	P4	50
150	55	40	0.32	P4	30
160	55	40	0.35	P2	60
180	55	40	0.38	P2	50
200	55	40	0.51	P2	36
250	55	40	0.80	P2	21
300	55	40	1.00	P1	26
315	55	40	1.10	P1	25
355	55	40	1.33	P1	20
400	55	40	1.94	P1	12
450	55	40	2.34	P1	7

DIAMETER D	I	IP	KG	DOOS	STUKS
500	55	40	3.46	P1	6
560	55	70	4.10	P1	5
600	55	70	4.84		
630	55	70	5.00	P1	4
710	55	70	6.58	-	1
800	55	70	8.20	-	1