
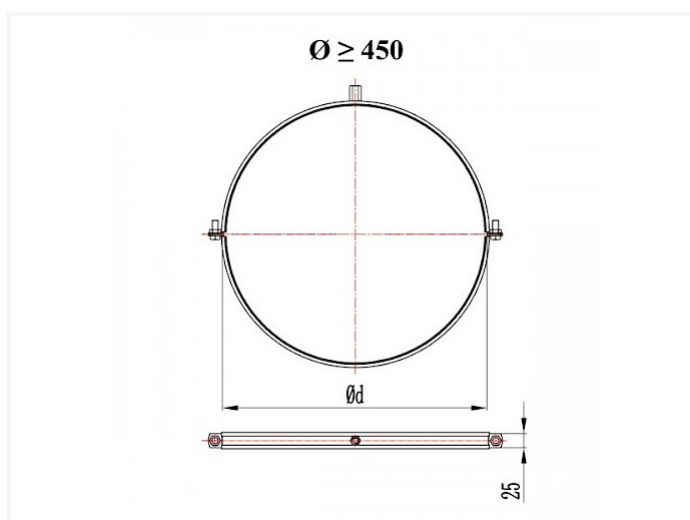


ODR ~ Ophangbeugel met rubber

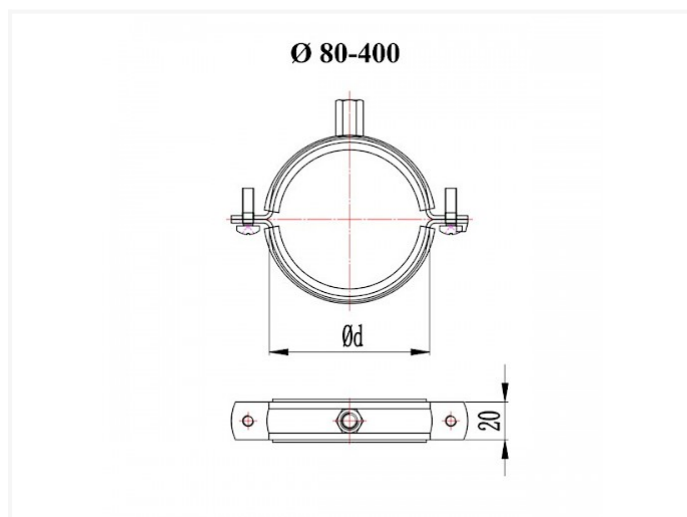

Technische specificaties

DIAMETER	MOER	BREEDTE(MM)	DIKTE(MM)	STUKS	KG	MAX. DRAAGKRACHT(KG)
80	M8/M10	20	1,8	150	0.15	800
100	M8/M10	20	1,8	125	0.17	800
125	M8/M10	20	1,8	100	0.20	800
150	M8/M10	20	1,8	75	0.23	800
160	M8/M10	20	1,8	75	0.25	800
180	M8/M10	20	1,8	70	0.27	800

DIAMETER	MOER	BREEDTE(MM)	DIKTE(MM)	STUKS	KG	MAX. DRAAGKRACHT(KG)
200	M8/M10	20	1,8	60	0.28	800
224	M8/M10	20	1,8	55	0.32	800
250	M8/M10	20	1,8	65	0.35	800
280	M8/M10	20	1,8	50	0.38	800
300	M8/M10	20	1,8	50	0.40	800
315	M10	20	1,8	50	0.43	800
355	M10	20	1,8	50	0.47	800
400	M10	20	2,5	40	0.53	800
450	-	25	2,5	10	0.85	1.000
500	-	25	2,5	10	0.95	1.000
560	-	25	2,5	10	1.00	1.000
630	-	25	2,5	10	1.13	1.000
710	-	25	2,5	10	1.15	1.000
800	-	25	2,5	10	1.17	1.000

Om ronde buizen op te hangen in een ventilatiesysteem.

- materiaal: gegalvaniseerd staal met rubber
- standaard diameters: van 80mm tot 800mm
- snelvergrendelingssysteem aan één zijde voor diameters 80-400mm
- vergrendelingsschoef M6x20 van 80-400mm, M10x25 van 450-800mm
- Hex moer M8/M10 van 80-400mm