


VX ~ Raccordo maschio con guarnizione

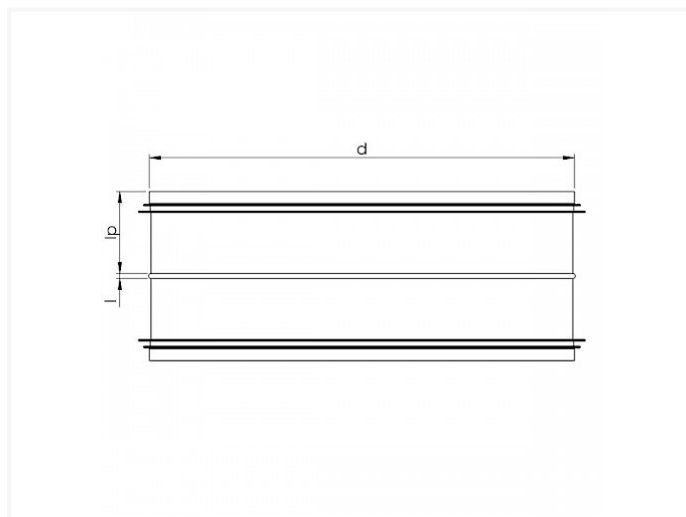

Scheda tecnica

DIAMETRO D	IP	I	KG	SCATOLA	PEZZI
80	40	8	0,12	P12	80
100	40	8	0,15	P6	110
125	40	8	0,19	P6	72
140	40	8	0,2	P4	98
150	40	8	0,21	P6	45
160	40	8	0,23	P4	70
180	40	8	0,26	P4	56
200	40	8	0,29	P4	50
224	40	8	0,33	P4	30
250	40	8	0,37	P2	63
280	40	8	0,4	P2	50
300	40	8	0,43	P2	45
315	40	8	0,46	P2	36

DIAMETRO D	IP	I	KG	SCATOLA	PEZZI
355	40	8	0,5	P1	55
400	40	8	0,67	P1	50
450	70	8	0,95	P1	20
500	70	8	1,06	P1	18
560	70	8	1,19	P1	16
600	70	8	1.50	P1	16
630	70	8	2,01	P1	14
710	70	8	2,26	P1	10
800	95	8	3,9	P1	7
900	95	8	4.65	-	1
1000	120	8	5.32	-	1
1120	120	8	5.96	-	1
1250	120	8	6.59	-	1