


VB ~ Raccordo maschio

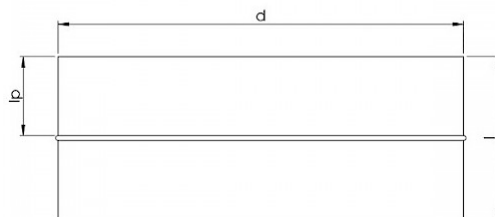

Scheda tecnica

DIAMETER	H	KG	DOOS	STUKS
80	40	0,12	P12	80
100	40	0,15	P6	112
112	40	0,17	P6	60
125	40	0,19	P6	81
140	40	0,2	P6	60
150	40	0,21	P6	50
160	40	0,23	P4	70
180	40	0,26	P4	60
200	40	0,29	P4	50
224	40	0,33	P4	40
250	40	0,37	P2	72
280	40	0,4	P2	50
300	40	0,43	P2	45

DIAMETER	H	KG	DOOS	STUKS
315	40	0,46	P2	46
350	40	0,48	P1	55
355	40	0,5	P1	65
400	40	0,67	P1	50
450	45	0,81	P1	34
500	55	0,9	P1	24
560	55	1,01	P1	21
630	55	1,58	P1	22
710	55	1,78		10