


VFB ~ Raccordo femminile

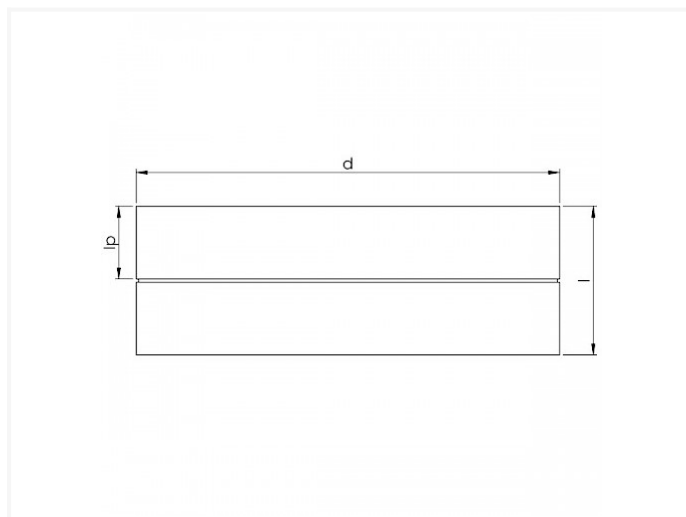

Scheda tecnica

DIAMETER	D	H	KG	DOOS	STUKS
80	80.5	40	0,12	P12	80
100	100.5	40	0,16	P6	112
125	125.5	40	0,2	P6	81
140	140.6	40	0,21	P6	60
150	150.6	40	0,22	P6	50
160	160.6	40	0,24	P4	70
180	180.6	40	0,27	P4	60
200	200.7	40	0,3	P4	50
224	224.7	40	0,34	P4	30
250	250.8	40	0,39	P2	72
280	280.8	40	0,42	P2	50
300	300.9	40	0,45	P2	45
315	315.9	40	0,47	P2	46

DIAMETER	D	H	KG	DOOS	STUKS
355	356.0	40	0,58	P1	55
400	401.0	40	0,69	P1	50
450	451.1	45	0,81	P1	20
500	501.1	55	0,9	P1	15
560	561.2	55	1,01	P1	16
630	631.2	55	1,67	P1	12
710				P1	10