


GDF ~ Silenziatore flexible

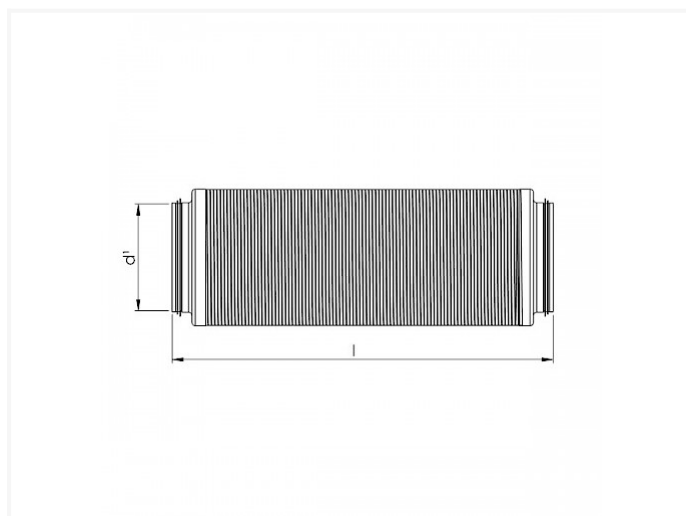

Scheda tecnica

Gli silenzianti flessibile GDF hanno un isolamento di 25mm. Altri spessori sono disponibile su richiesta.

GDF

Centrum frequentie (Hz)

| Ø (mm) | D (mm) | L | Gewicht (kg) | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 | Verpakking |
|--------|--------|------|--------------|-----|-----|-----|------|------|------|------|------------|
| 80 | 125 | 1000 | 0.8 | 5 | 9 | 19 | 34 | 50 | 48 | 37 | 45 |
| 100 | 150 | 1000 | 1.0 | 3 | 8 | 18 | 33 | 50 | 39 | 31 | 35 |
| 125 | 180 | 1000 | 1.2 | 3 | 7 | 17 | 33 | 50 | 35 | 27 | 24 |
| 140 | 180 | 1000 | 1.3 | 2 | 6 | 15 | 32 | 50 | 34 | 25 | 20 |
| 150 | 200 | 1000 | 1.4 | 2 | 6 | 15 | 32 | 49 | 33 | 24 | 20 |
| 160 | 200 | 1000 | 1.4 | 2 | 6 | 13 | 29 | 40 | 25 | 18 | 20 |
| 180 | 224 | 1000 | 1.6 | 1 | 5 | 12 | 29 | 38 | 21 | 14 | 15 |
| 200 | 250 | 1000 | 1.8 | 2 | 5 | 11 | 25 | 26 | 14 | 11 | 12 |
| 224 | 280 | 1000 | 2.0 | 1 | 4 | 11 | 24 | 25 | 13 | 10 | 9 |
| 250 | 300 | 1000 | 2.2 | 1 | 4 | 11 | 22 | 23 | 13 | 10 | 8 |

GDF

| | | | | | | | | | | | |
|-----|-----|------|-----|----|---|----|----|----|----|---|---|
| 280 | 355 | 1000 | 2.5 | 1 | 4 | 11 | 24 | 21 | 11 | 9 | 6 |
| 300 | 355 | 1000 | 2.6 | 1 | 4 | 10 | 24 | 20 | 10 | 8 | 6 |
| 315 | 355 | 1000 | 2.8 | 1 | 4 | 9 | 18 | 20 | 10 | 8 | 6 |
| 355 | 400 | 1000 | 3.2 | 1 | 4 | 8 | 17 | 16 | 9 | 7 | 5 |
| 400 | 450 | 1000 | 3.6 | 1 | 4 | 8 | 10 | 12 | 8 | 7 | 3 |
| 450 | 500 | 1000 | 4.1 | -- | 2 | 6 | 8 | 10 | 6 | 5 | |