


GD ~ Schalldämpfer

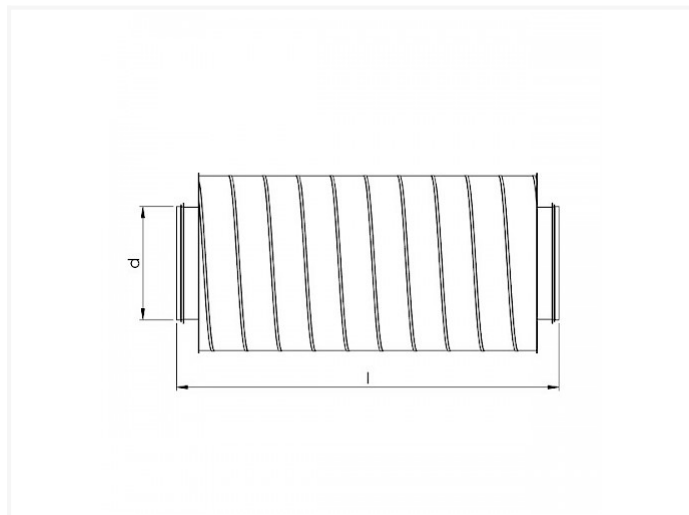

Technische Daten

Der Schalldämpfer GD hat eine Standardisolation von 50mm. Andere Isolationsdicken sind verfügbar jedoch auf Anfrage.

GD (ISOLATION 50MM)

Mittenfrequenz (Hz)

Ø (mm)	D (mm)	L (mm)	Gewicht (kg)	63	125	250	500	1000	2000	4000	8000	Verpackung
80	180	300	2	4	6	5	10	27	47	43	15	48
80	180	600	3	4	9	13	20	38	50	45	24	24
80	180	900	5	4	11	22	42	49	50	48	33	24
100	200	300	2	3	8	7	10	25	37	36	12	40
100	200	600	4	4	9	11	19	33	45	40	19	20
100	200	900	7	4	10	15	28	40	50	44	27	20
125	224	300	3	3	4	7	11	15	14	14	11	30
125	224	600	4	4	6	10	19	28	33	25	18	15
125	224	900	7	4	9	14	27	42	50	35	24	15
160	250	300	3	1	2	5	9	17	14	16	8	24
160	250	600	6	2	4	8	16	26	26	23	10	12
160	250	900	9	3	5	11	23	35	39	30	12	12

GD (ISOLATION 50MM)

200	300	300	4	0	2	5	12	11	10	10	9	16
200	300	600	7	0	3	7	16	22	20	13	10	8
200	300	900	10	1	5	10	19	32	31	16	11	8
250	355	300	5	1	1	3	8	10	9	4	4	12
250	355	600	9	1	2	6	13	19	15	8	6	6
250	355	900	12	2	3	9	17	26	21	13	8	6
315	400	600	10	0	1	4	10	12	7	4	4	5
315	400	900	15	1	2	6	15	21	15	8	7	5
400	500	600	8	1	1	4	10	11	5	1	2	2
400	500	900	24	1	2	5	13	15	8	3	2	2
450	560	600	9	1	1	4	10	12	4	2	2	2
450	560	900	27	1	2	5	13	13	6	4	3	2
500	600	600	10	1	1	3	10	8	2	2	2	2
500	600	900	30	1	2	4	13	11	3	4	2	2

GD 100 (ISOLATION 100MM)

Mittenfrequenz (Hz)

Ø (mm)	D (mm)	L (mm)	Gewicht (kg)	63	125	250	500	1000	2000	4000	8000	Verpackung
250	450	600	12	3	5	10	16	19	15	8	6	3
250	450	900	20	4	6	14	24	26	21	13	8	3
250	450	1200	25	5	7	17	31	34	28	17	10	3
315	500	600	12	2	5	13	20	21	14	8	6	2
315	500	900	18	2	5	13	20	21	14	8	6	2
315	500	1200	24	3	7	17	27	29	21	11	9	2
400	600	600	14	1	4	10	12	11	6	2	2	2
400	600	900	41	2	5	11	17	15	9	3	2	2
400	600	1200	47	3	6	13	23	20	12	4	3	2
450	560	600	15	2	5	11	16	9	4	2	2	1
450	560	900	24	3	6	12	21	15	8	4	3	1
450	560	1200	35	3	7	14	23	16	8	5	3	1
500	710	600	17	2	5	11	14	7	2	3	2	1

GD 100 (ISOLATION 100MM)

500	710	900	26	3	6	12	20	10	3	4	3	1
500	710	1200	39	3	7	14	23	17	4	5	3	1
630	800	900	49	3	3	8	16	6	3	3	3	1
630	800	1200	57	2	3	10	19	10	4	3	3	1
710	900	900	55	2	3	9	13	5	2	3	2	1
710	900	1200	64	2	3	10	17	9	3	3	3	1
800	1000	1200	72	3	3	10	15	7	3	3	4	1